# PRO CAST

BROADCAST QUALITY DYNAMIC MICROPHONE

The Procaster is a professional broadcast-quality dynamic microphone, specifically designed to offer no-compromise performance for voice applications such as podcasting, streaming, voice-over and radio broadcast. It features an internal pop filter to control plosives, and its tight polar pattern helps to reject ambient noise. An established favourite amongst podcasters and livestreamers, the Procaster offers a rich, natural tone that flatters any voice type.

- Broadcast-quality dynamic microphone for podcasting, radio production and voice-overs
- Internal pop filter Integrated capsule shock mounting
- Robust all-metal construction
- 10-year warranty











Polar Pattern:         Cardioid           Address Type:         End           Frequrncy Range:         75Hz - 18kHz           Output Impedance:         320Ω           -56 0dB re 1 Volt/Pascal (1.60mV @ 94 dB)		
Address Type:EndFrequrncy Range:75Hz - 18kHzOutput Impedance:320ΩSensitivity:-56.0dB re 1 Volt/Pascal (1.60mV @ 94 dB SPL) +/- 2 dB @ 1kHz	Acoustic Principle:	Dynamic
Frequrncy Range: 75Hz - 18kHz  Output Impedance: 320Ω  Sensitivity: -56.0dB re 1 Volt/Pascal (1.60mV @ 94 dB SPL) +/- 2 dB @ 1kHz	Polar Pattern:	Cardioid
Output Impedance: 320Ω  Sensitivity: -56.0dB re 1 Volt/Pascal (1.60mV @ 94 dB SPL) +/- 2 dB @ 1kHz	Address Type:	End
-56.0dB re 1 Volt/Pascal (1.60mV @ 94 dB SPL) +/- 2 dB @ 1kHz	Frequency Range:	75Hz - 18kHz
Sensitivity: SPL) +/- 2 dB @ 1kHz	Output Impedance:	320Ω
Output Connection: XLR	Sensitivity:	•
	Output Connection:	XLR







## MECHANICAL SPECIFICATIONS

## WHATS IN THE BOX

Weight (grams):	745
Dimensions (millimetres):	Length: 53 Width: 53 Height: 214
Compatible RØDE Accessories:	WS2, PSM1, PSA1+, PSA1
Included Accessories:	1 x RM2 1 x ZP1






ZP1

Procaster


# DIMENSIONS

53mm

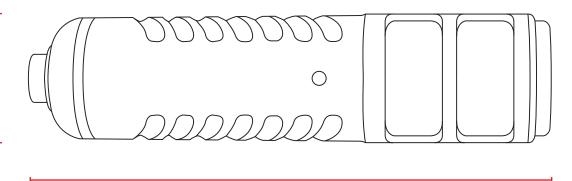

214mm

### POLAR PATTERN



### FREQUENCY RESPONSE

